


15.Reel and reel stand

Reel

Order number	Model	Outside diameter ×root diameter ×width of coil (mm)	Weight (kg)
15111	SE-1	Φ480×Φ220×340	13
15112	SE-2	Φ720×Φ400×640	30
15113	SE-3	Φ850×Φ400×640	40
15114	SE-4	Φ950×Φ400×640	50
15115	SE-5	Φ1100×Φ400×640	55
15116	SE-6	Φ1200×Φ400×640	59

·Uses :to load wire rope



Cradle reel stand

Order number	Model	Outside diameter ×root diameter ×width of coil (mm)	Weight (kg)
15101	SE-1J	1000×420×350	12
15102	SE-2J	1400×720×530	16
15103	SE-3J	1400×720×530	16
15104	SE-4J	1660×720×630	20
15105	SE-5J	1750×730×680	30
15106	SE-6J	1840×730×710	39

· Uses : to support reelstand.

· note :mating model is one to one corresponding .



Upright payout turntable


Order number	Model	Diameter of trestle (mm)	Bearing power(kg)	Weight (kg)	features
151131	SIW-1	Φ500	1000	36	Small cover slab
15132	SIW-3A	Φ800	3000	70	
15133	SIW-3B	Φ1000	3000	102	
15134	SIW-3	Φ800	3000	92	Big cover slab
15135	SIW-5	Φ1500	5000	129	Small cover slab



Integrated reel stand with disc tension brake

Order number		15141	15142	15143
Model		SIPZ3A	SIPZ5A	SIPZ-7
Applicable reel	Diameter of coil (mm)	Φ900~1600	Φ1600~2400	Φ1800~2500
	Width of coil (mm)	≤1350	≤1350	≤1700
	Diameter of axle hole (mm)	Φ65-100	Φ65-100	Φ120
	Maximum weight (kg)	3000	5000	7000
Brake torque (N.m)		1000	1000	2000
Linespeed (m/min)		80	80	80
Weight (kg)		200	215	420

·Notes:

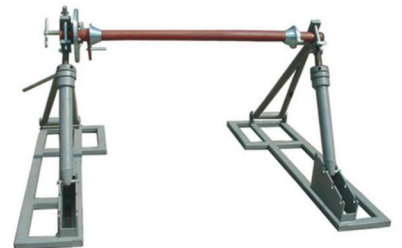

1. to support reel in tension releasing wire or mechanically linepulling wire and to brake the reel
2. can be disassembled into 3 pieces ,convenient transportation .
3. SIPZ-7 is double –disc brake .

Model DW2240A conductor reel stands

·order number : 15151

·Essential technical parameters

Maximum torque (N.m):1200

Maximum rotate speed (rpm):45

Axial diameter (mm): $\Phi 60$

Applicable coil

Diameter of coil (mm): $\Phi 1250 \sim 2240$

Maximum width of coil (mm):1400

Axle hole diameter (mm): $\Phi 80 \sim 125$

Parallel hole diameter (mm): $\Phi 40 \sim 65$

Centre distance between axle hole and parallel hole (mm):160~300

Maximum gross weight (kg):5000

·weight (kg):270

·note : the length of hydraulic tube is 13m



Model SIPZ-7H conductor reel stands

·order number :15152

·Essential technical parameters

Maximum work torque (N.m):2000

Maximum rotate speed (rpm):45

Axial diameter (mm): $\Phi 76$

Applicable coil :

Diameter of coil (mm): $\Phi 1250 \sim 2500$

Maximum width of coil (mm):1400

Axle hole diameter (mm): $\Phi 80 \sim 125$

Parallel hole diameter (mm): $\Phi 40 \sim 65$

Centre distance between axle hole and parallel hole (mm):160~300

Maximum gross weight (kg):7000

·weight (kg):350

·note : the length of hydraulic tube is 13m



Model SIPZ-7K conductor reel stands

·order number :15153

·Essential technical parameters

Maximum work torque (N.m):2500

Maximum rotate speed (rpm):45

Axial diameter (mm): $\Phi 76$

Applicable coil :

Diameter of coil (mm): $\Phi 1800 \sim 2800$

Maximum width of coil (mm):1700

Axle hole diameter (mm): $\Phi 125 \sim 160$

Parallel hole diameter (mm): $\Phi 65$



Centre distance between axle hole and parallel hole (mm):300~500

Maximum gross weight (kg):7000

·weight (kg):350

·note : the length of hydraulic tube is 13m

Reel payout stand with drum brake

Order number		15161	15162	15163
Model		SIDZ-3	SIDZ-5	SISZ-7
Applicable reel	Diameter of coil (mm)	Φ1250~2000	Φ1600~2400	Φ1800~2500
	Width of coil (mm)	≤1200	≤1200	≤1700
	Diameter of axle hole (mm)	Φ65-80	Φ65-103	Φ120
	Maximum weight (kg)	3000	5000	5000
Brake force (kN)		1.3	1.3	2.5
Linespeed (m/min)		40	40	40
Weight (kg)		240	280	400
Remarks		Single wheel	Single wheel	Double wheel



·uses :to support reel in tension releasing wire or mechanically linepulling wire and to brake the reel .

·feature :can be disassembled into 3 pieces ,convenient transportation .

Reel payout stand with band brake

Order number	Model	Applicable reel				Brake force (kN)	Linespeed (m/min)
		Diameter of coil (mm)	Width of coil (mm)	Diameter of axle hole (mm)	Maximum weight (kg)		
15171	SIKZ-3	≤Φ2000	≤1350	≤Φ65-80	≤3000	0.5	≤25
15172	SIKZ-5	≤Φ2400	≤1350	≤Φ76-103	≤5000	0.5	≤25



Simple reel payout stand

Order number	Model	Rated load (kN)	Range of adjustable height (mm)	Weight (kg)	Order number	Model	Rated load (kN)	Range of adjustable height (mm)	Weight (kg)
15181	SIC-1	10	450-650	20	15201	SIK-3	30	400-1000	30
15182	SIC-3	30	600-900	25	15202	SIK-5	50	710-1270	44
15191	SIL-1	10	450-650	22	15211	SIL-3A	30	400-1000	28
15192	SIL-3	30	600-900	24	15212	SIL-5A	50	900-1300	35
15193	SIL-5	50	900-1300	27					

·Features: to adjust reel by screw mandrel .light ,handy and practicable .it fit releasing wire manually .



SIL-A



SIL



SIC



SIC