


10.Stringing blocks

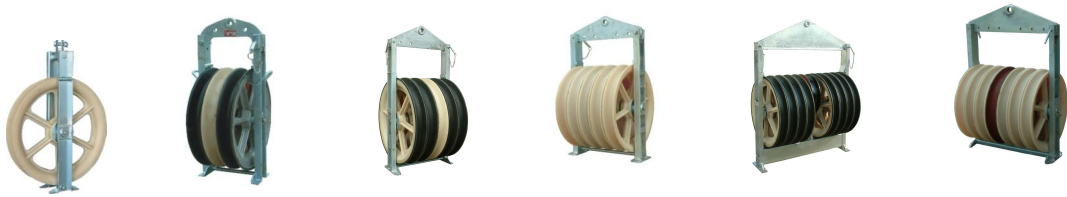

Model 508 Large diameter stringing block

Order number	Model	Number of wheel	Rated load(kN)	Weight (kg)	Features
10101	SHD508	1	20	18	Cemented Aluminous sheave
10102	SHS508	3	40	61	Middle :cast steel sheave Conductor: cemented aluminous sheave
10103	SHW508	5	60	93	
10104	SHDN508	1	20	16	MC nylon sheave
10105	SHSLN508	3	40	47	Middle :MC nylon sheave Conductor: cemented aluminous wheel
10106	SHWLN508	5	60	79	
10107	SHSQN508	3	40	43	MC nylon sheave
10108	SHWQN508	5	60	70	

. Note :

1. Maximum suitable conductor LGJ400.
2. Block dimension (outside diameter× root diameter × sheave width) $\Phi 508 \times \Phi 408 \times 75$